


**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115510 for correct orientation.

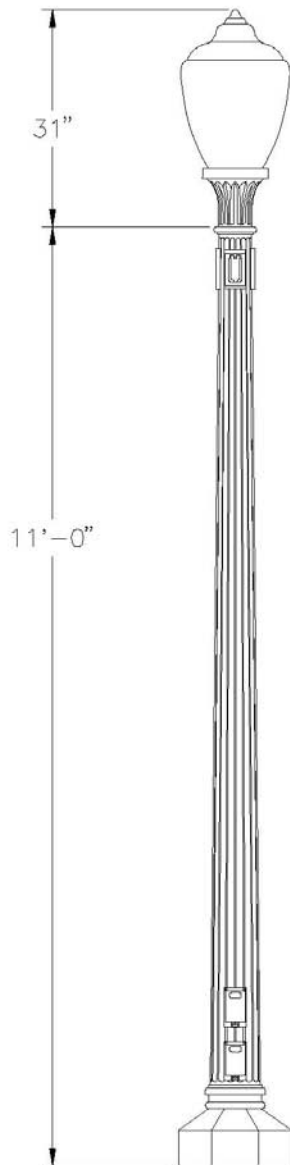

sign  
&  
date

**Customer Approval**

Catalog#

PA RF16CIT 11 2BAB (2)FGIUS-S FG-S L/ELEC ANBK  
 AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction, using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

(2)BAB - banner arm mounting provision.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

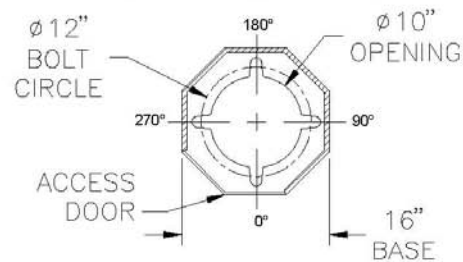

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 11'-0"

Base Size: 16" OCT

Overall Height: 13'-7"

Top Light Center: 12'-3"

date:  
8/29/06


scale:  
NTS

dwg#:  
L-6169AR1

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115511 for correct orientation.

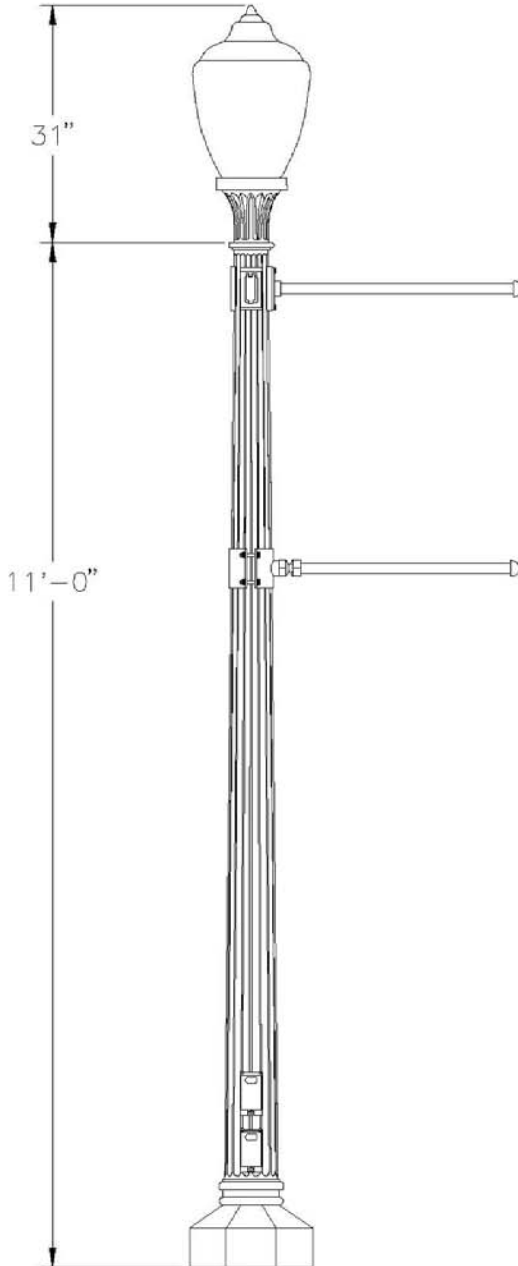

sign  
&  
date

**Customer Approval**

Catalog# PA RF16CIT 11 2FGIUS-S FG-S LESS ELECTRICAL ANBK  
 1BAB BAB 30H4 ANBK BAC19 BACD6 27H4 BBA ANBK  
 AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction consisting using cast iron tooling of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

BAB - banner arm mounting provision.

BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

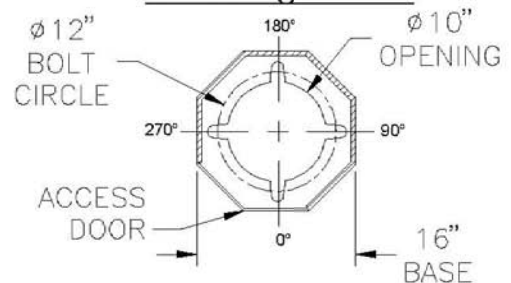

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 11'-0"

Base Size: 16" OCT

Overall Height: 13'-7"

Top Light Center: 12'-3"

date:

8/29/06

scale:


NTS

dwg#:

L-6169BR1

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

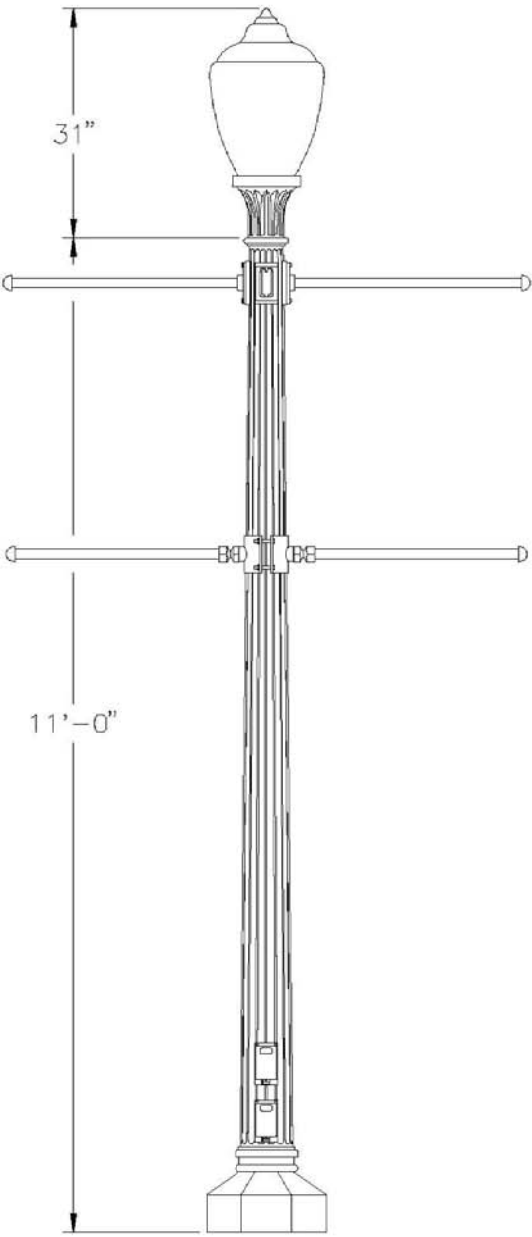

sign & date	<b><u>Customer Approval</u></b>
	_____
Catalog#	PA RF16CIT 11 2FGIUS-S FG-S LESS/ELEC ANBK 2BAB 30H4 ANBK BAC28 BACD6 27H4 BBA ANBK AT23 D 100M MED ACT TB LBR5 ANBK

<b>Rockford Series</b> <b>Cast Aluminum Post</b>				
---	--	--	--	--

**Post:**  
 Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**  
 Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**  
 (2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials.  
 (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.  
 FG-S/LE - provision for duplex outlet with weatherproof cover.

**Anchorage:**  
 Post shall be furnished with (4) 3/4" hot-dip galvanized L-type anchor bolts.

**Finish:**  
 Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**




**Note:**  
 All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 11'-0"      Overall Height: 13'-7"  
 Base Size: 16" OCT      Top Light Center: 12'-3"

date: 8/29/06	scale: NTS	dwg#: L-6169CR2
------------------	---------------	--------------------

<b>ANTIQUE Street Lamps</b>	
2011-B W. Rundberg Lane (512) 977-8444	• Austin, TX 78758-5946 • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115513 for correct orientation.

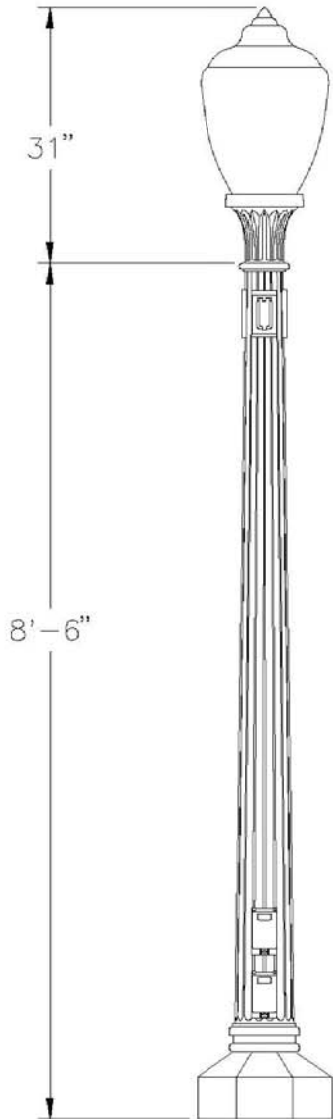

sign  
&  
date

**Customer Approval**

Catalog#

PA RF16CIT 8-6 2BAB 2FGIUS-S FG-S L/ ELECTRICAL ANBK  
 AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240
■ - MED <input type="checkbox"/> - MOG	<input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

(2)BAB - banner arm mounting provision.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

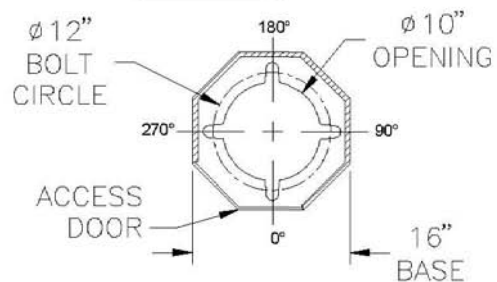

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"  
 Base Size: 16" OCT

Overall Height: 11'-1"  
 Top Light Center: 9'-9"

date:

8/29/06

scale:

NTS


dwg#

L-6169DR1

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115514 for correct orientation.

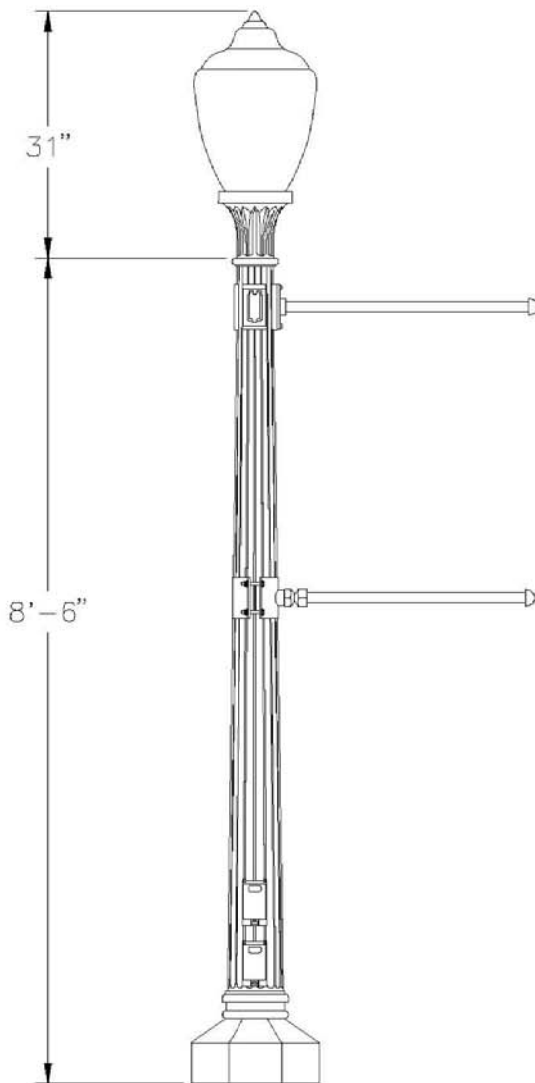

sign  
&  
date

**Customer Approval**

Catalog# PA RF16CIT 8-6 2FGIUS-S FG-S L/ ELECTRICAL ANBK  
 1BAB BAB 30H4 ANBK BAC19 BACD6 27H4 BBA ANBK  
 AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

BAB - banner arm mounting provision.

BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

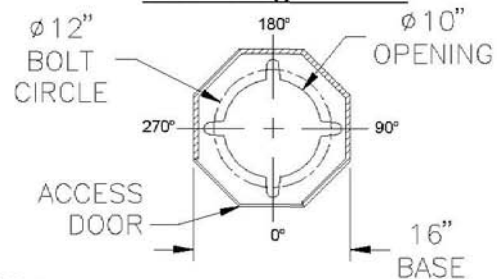

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"  
 Base Size: 16" OCT

Overall Height: 11'-1"  
 Top Light Center: 9'-9"

date:

8/29/06

scale:


NTS

dwg#

L-6169ER1

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

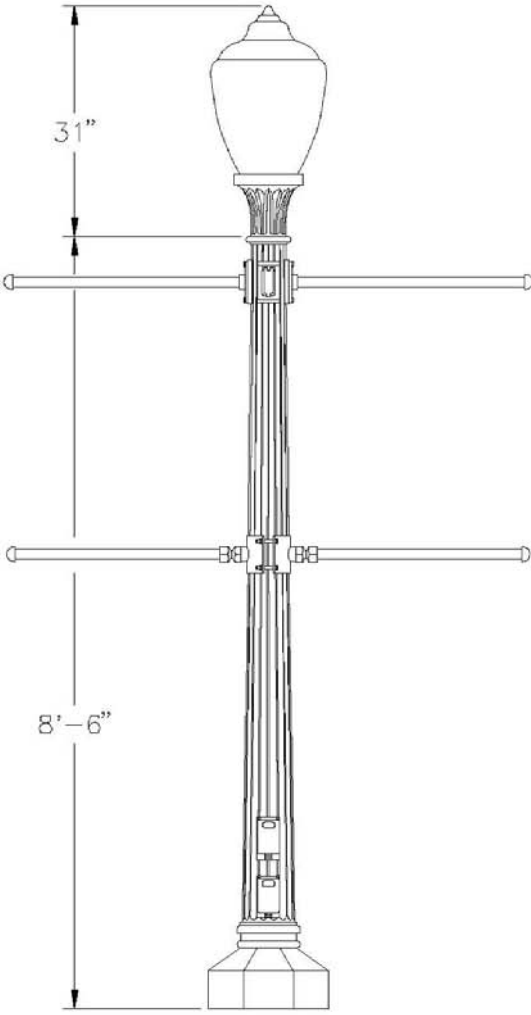

sign & date	<b><u>Customer Approval</u></b>
	_____

Catalog# PA RF16CIT 8-6 2FGIUS-S FG-S L/ELECTRICAL ANBK  
 2BAB 30H4 ANBK BAC28 BACD6 27H4 BBA ANBK  
 AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**  
 Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**  
 Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**  
 (2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials.  
 (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.  
 FG-S/LE - provision for duplex outlet with weatherproof cover.

**Anchorage:**  
 Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**  
 Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

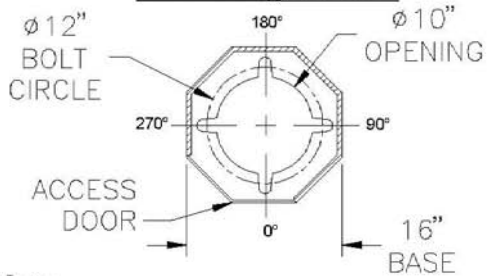

**Note:**  
 All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.


Post Height: 8'-6"      Overall Height: 11'-1"  
 Base Size: 16" OCT      Top Light Center: 9'-9"

date 8/29/06	scale NTS	dwg# L-6169FR2
-----------------	--------------	-------------------

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane      • Austin, TX 78758-5946  
 (512) 977-8444      • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115513 for correct orientation.

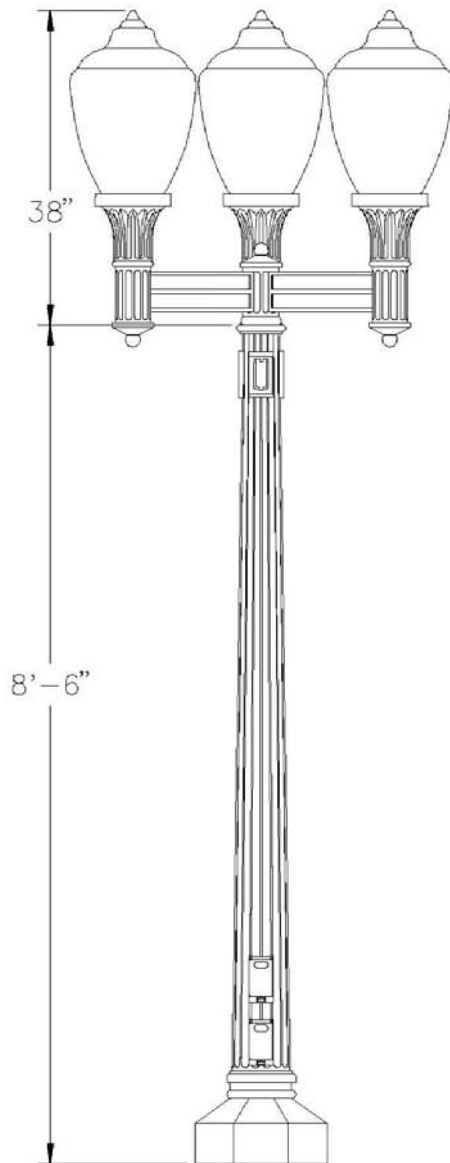

sign  
&  
date

**Customer Approval**

Catalog#

PA RF16CIT 8-6 2BAB 2FGIUS-S FG-S L/ ELECTRICAL ANBK  
 PCP36/3 ANBK 3AT23 D 100M MED ACT TB LBR5 ANBK

## Rockford Series Cast Aluminum Post

### Post:

Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

### Arm:

Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

### Luminaire:

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

### Accessories:

(2)BAB - banner arm mounting provision.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


### Anchorage:

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

### Finish:

Post, arm accessories and luminaire shall be furnished with a black powder coat finish.

### Anchorage Detail

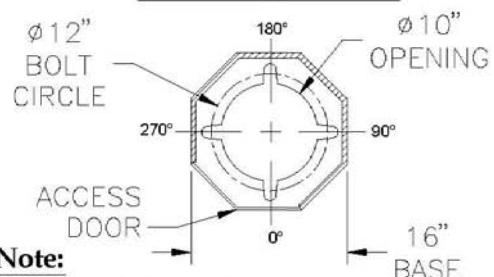

### Note:

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"

Base Size: 16" OCT

Overall Height: 11'-8"

Top Light Center: 10'-4"

date

8/29/06

scale

NTS


dwg#

L-6169GR1

## ANTIQUE Street Lamps

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115514 for correct orientation.

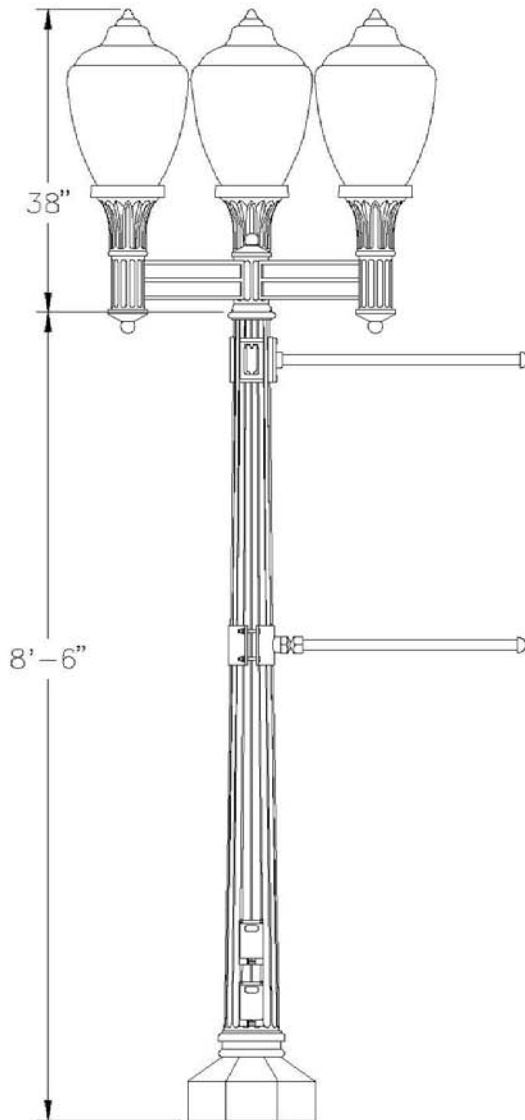

sign  
&  
date

**Customer Approval**

Catalog# PA RF16CIT 8-6 2FGIUS-S FG-S L/ ELECT ANBK  
 1BAB BAB 30H4 ANBK BAC19 BACD6 27H4 BBA ANBK  
 PCP36/3 ANBK 3AT23 D 100M MED ACT TB LBR5 ANBK

### Rockford Series Cast Aluminum Post

#### **Post:**

Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

#### **Arm:**

Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

#### **Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H □ - 100H □ - 175H □ - 250H	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

#### **Accessories:**

BAB - banner arm mounting provision.

BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.

BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

FG-S/LE - provision for duplex outlet with weatherproof cover.


#### **Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

#### **Finish:**

Post, arm, accessories and luminaire shall be furnished with a black powder coat finish.

#### **Anchorage Detail**

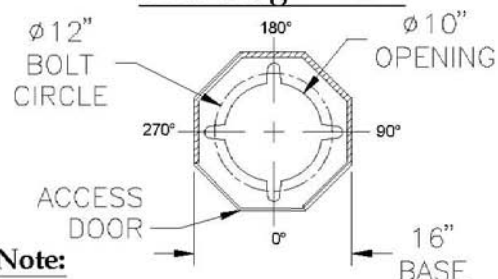

#### **Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"

Base Size: 16" OCT

Overall Height: 11'-8"

Top Light Center: 10'-4"

date:  
8/29/06

scale:  
NTS


dwg#:  
L-6169HR1

### ANTIQUE Street Lamps

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622



**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-115515 for correct orientation.

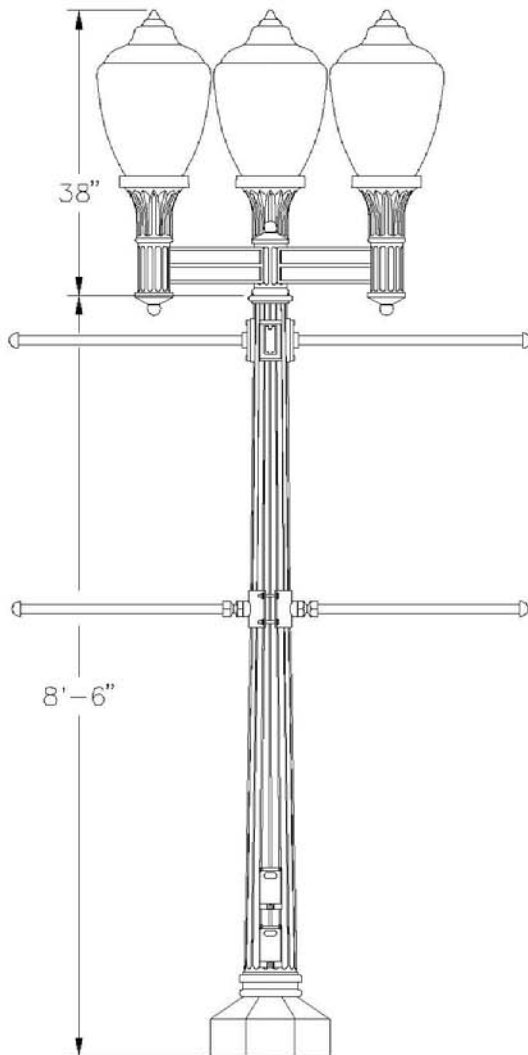

sign  
&  
date

**Customer Approval**

Catalog# PA RF16CIT 8-6 2FGIUS-S FG-S L/ ELECTRICAL ANBK  
 2BAB 30H4 ANBK BAC28 BACD6 27H4 BBA ANBK  
 PCP36/3 ANBK 3AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Arm:**

Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

(2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials.

(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover

FG-S/LE - provision for duplex outlet with weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, arm, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

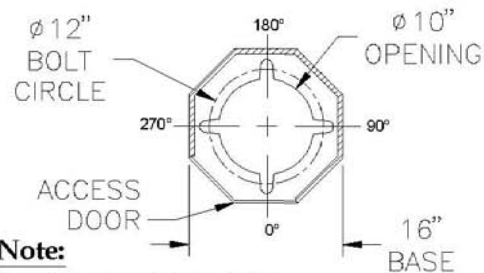

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"

Base Size: 16" OCT

Overall Height: 11'-8"

Top Light Center: 10'-4"

date:

8/29/06

scale:


NTS



dwg#


**L-6169JR1**

**ANTIQUE Street Lamps**


2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

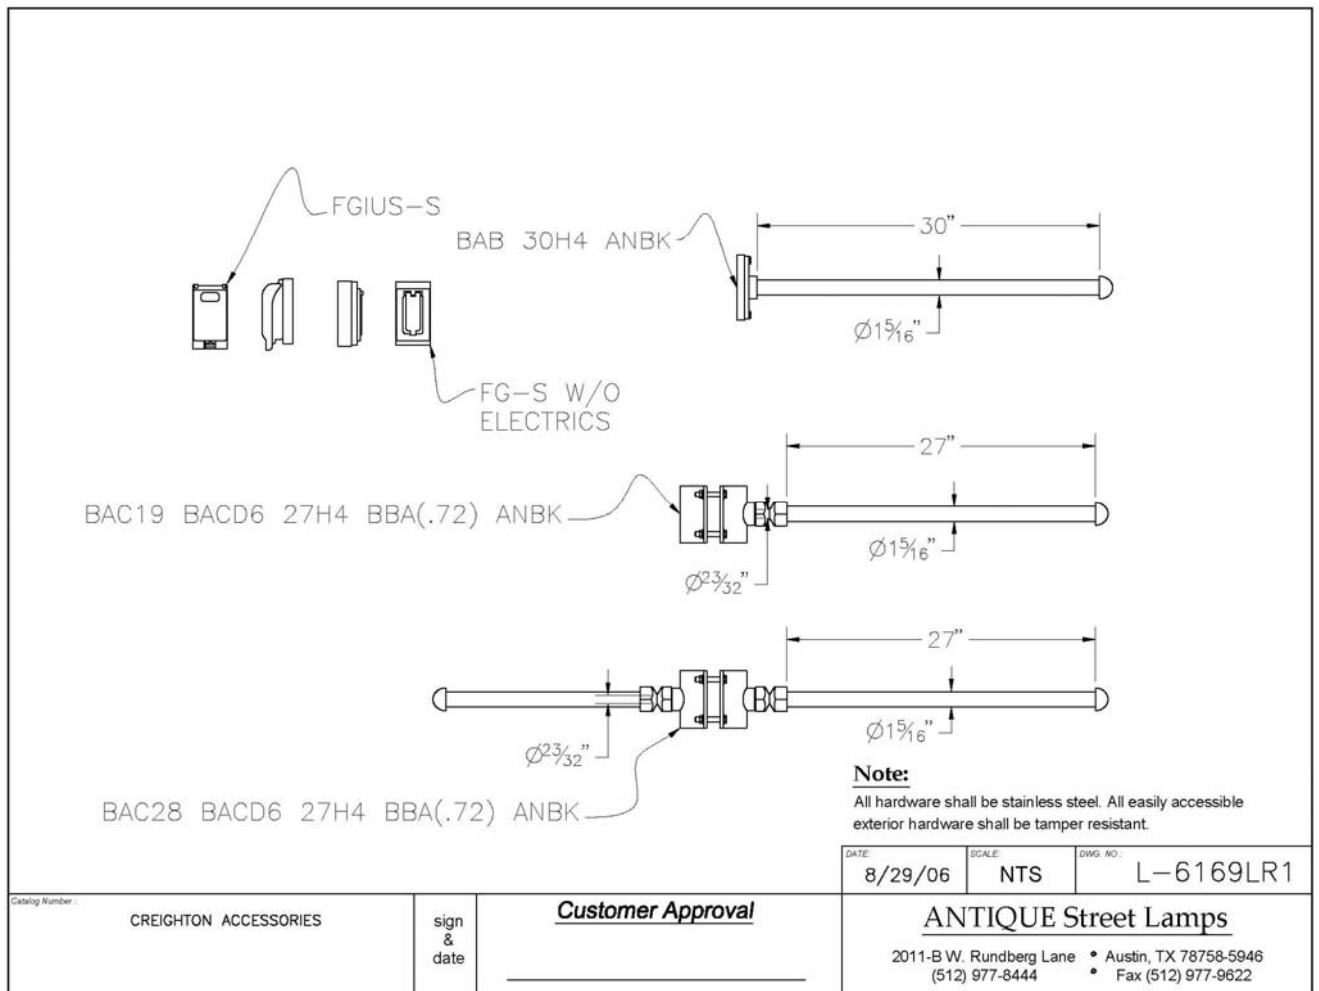


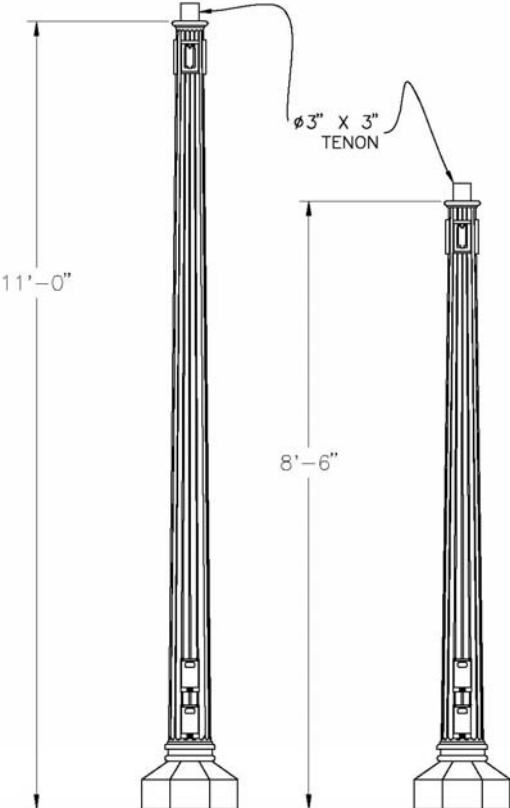 <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>PA RF16CIT 11 2BAB 2FGIUS-S FG-S L/ ELECTRICAL 3T3 ANBK</p> </div> <div style="text-align: center;"> <p>PA RF16CIT 8-6 2BAB 2FGIUS-S FG-S L/ ELECTRICAL 3T3 ANBK</p> </div> </div>		<p><b>Post:</b>          Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a Ø3" x 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.</p> <p><b>Accessories:</b>          (2)BAB - banner arm mounting provision.          (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover          FG-S/LE - provision for duplex outlet with weatherproof cover.</p> <p><b>Anchorage:</b>          Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.</p> <p><b>Finish:</b>          Posts shall be furnished with a black powder coat finish.</p> <div style="text-align: center; margin-top: 20px;"> <p><u>Anchorage Detail</u></p>  </div> <p><b>Note:</b>          All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 33%;">DATE: 8/29/06</td> <td style="width: 33%;">SCALE: NTS</td> <td style="width: 33%;">DWG. NO.: L-6169MR1</td> </tr> </table>	DATE: 8/29/06	SCALE: NTS	DWG. NO.: L-6169MR1
DATE: 8/29/06	SCALE: NTS	DWG. NO.: L-6169MR1			
<p>Catalog Number : CREIGHTON POSTS</p> <div style="display: flex; align-items: center; margin-top: 10px;"> <div style="width: 50px; text-align: center;">sign &amp; date</div> <div style="flex-grow: 1; border-bottom: 1px solid black; margin-left: 10px;"> <p style="text-align: center; margin-bottom: 0;"><u>Customer Approval</u></p> </div> </div>		<p style="text-align: center; margin-bottom: 10px;"><u>ANTIQUE Street Lamps</u></p> <div style="display: flex; justify-content: space-between; font-size: small;"> <div>2011-B W. Rundberg Lane (512) 977-8444</div> <div>• Austin, TX 78758-5946 • Fax (512) 977-9622</div> </div>			

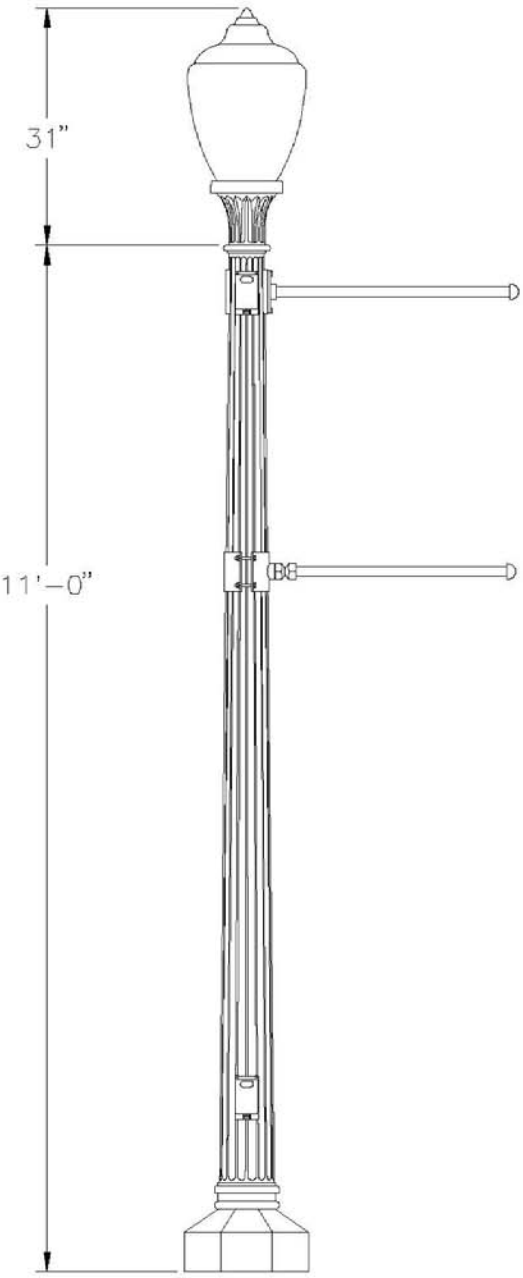

sign & date	<b><u>Customer Approval</u></b>
	_____
Catalog#	PA RF16CIT 11 2FGIUS-S ANBK 1BAB BAB 30H4 ANBK BAC19 BACD6 27H4 BBA ANBK AT23 D 100M MED ACT TB LBR5 ANBK
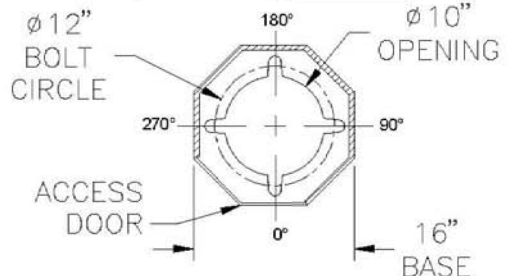
<b>Rockford Series</b> <b>Cast Aluminum Post</b>				
<b>Post:</b> Post shall be all cast aluminum construction consisting using cast iron tooling of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.				
<b>Luminaire:</b> Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.				
<b>Lamp Type</b>	<b>Mercury Vapor</b>	<b>Metal Halide</b>	<b>High Pressure Sodium</b>	<b>Voltage</b>
<i>HID Socket Size</i>	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB
<b>Accessories:</b> BAB - banner arm mounting provision. BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial. BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial. (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.				
<b>Anchorage:</b> Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.				
<b>Finish:</b> Post, accessories and luminaire shall be furnished with a black powder coat finish.				
<b>Anchorage Detail</b> 				
<b>Note:</b> All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.				
Post Height: 11'-0"		Overall Height: 13'-7"		
Base Size: 16" OCT		Top Light Center: 12'-3"		
date: 9/15/06	scale: NTS	dwg#: <b>L-6169QR1</b>		
<b>ANTIQUE Street Lamps</b>				
2011-B W. Rundberg Lane (512) 977-8444		• Austin, TX 78758-5946 • Fax (512) 977-9622		

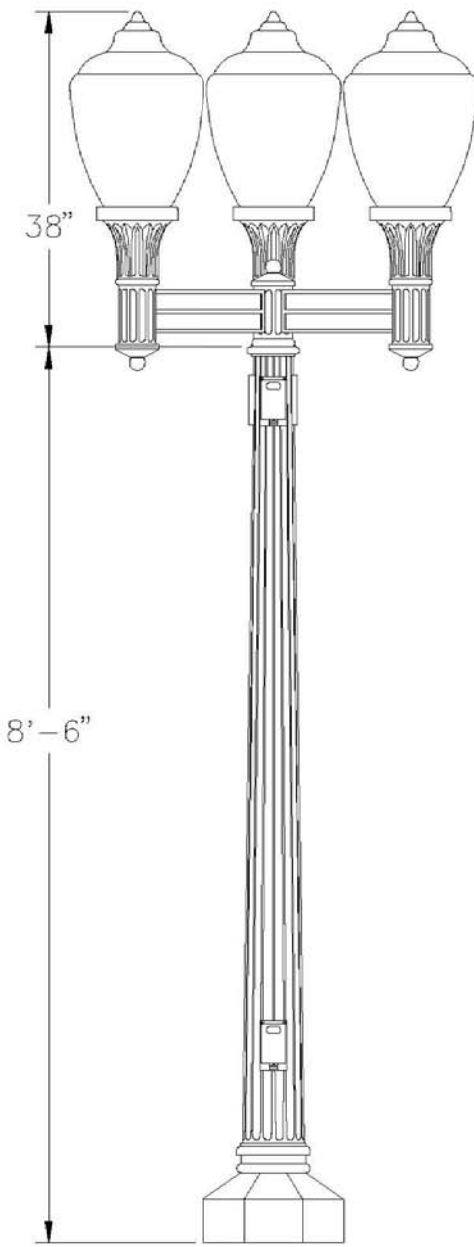

38"

8'-6"

sign & date	<b><u>Customer Approval</u></b>	
	_____	
Catalog#	PA RF16CIT 8-6 2BAB 2FGIUS-S ANBK PCP36/3 ANBK 3AT23 D 100M MED ACT TB LBR5 ANBK	

<b>Rockford Series</b> <b>Cast Aluminum Post</b>	
---	--

**Post:**  
 Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Arm:**  
 Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

**Luminaire:**  
 Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H □ - 100H □ - 175H □ - 250H	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

**Accessories:**  
 (2)BAB - banner arm mounting provision.  
 (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

**Anchorage:**  
 Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**  
 Post, arm accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

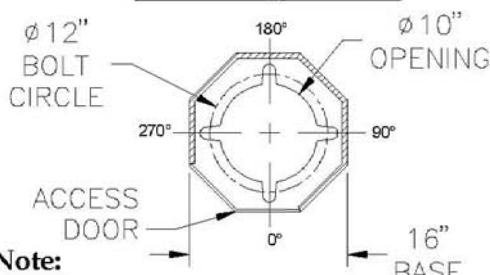


**Note:**  
 All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"      Overall Height: 11'-8"  
 Base Size: 16" OCT      Top Light Center: 10'-4"

date: 9/15/06	scale: NTS	dwg#: L-6169RR1
------------------	---------------	--------------------

<b><u>ANTIQUE Street Lamps</u></b>	
2011-B W. Rundberg Lane (512) 977-8444	• Austin, TX 78758-5946 • Fax (512) 977-9622

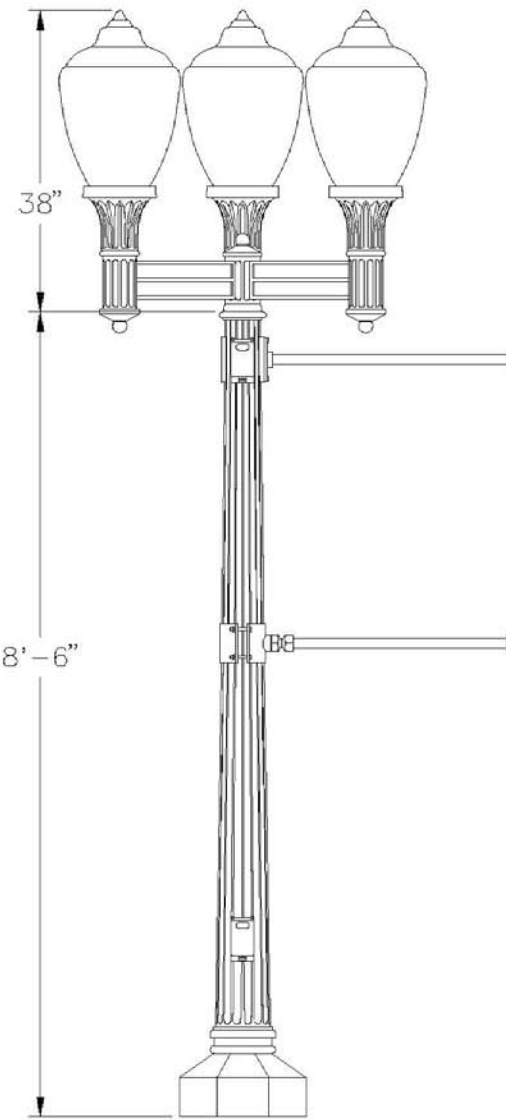

sign & date	<b><u>Customer Approval</u></b>
	_____
Catalog#	PA RF16CIT 8-6 2FGIUS-S ANBK 1BAB BAB 30H4 ANBK BAC19 BACD6 27H4 BBA ANBK PCP36/3 ANBK 3AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**  
Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Arm:**  
Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

**Luminaire:**  
Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H □ - 100H □ - 175H □ - 250H	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

**Accessories:**  
BAB - banner arm mounting provision.  
BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial.  
(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

**Anchorage:**  
Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**  
Post, arm, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

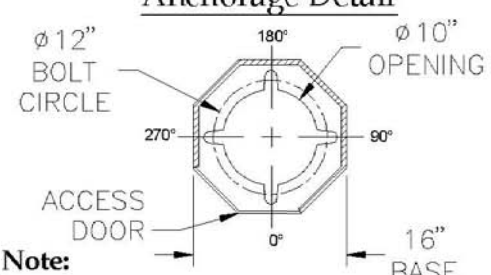


**Note:**  
All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"      Overall Height: 11'-8"  
Base Size: 16" OCT      Top Light Center: 10'-4"

date: 9/15/06	scale: NTS	dwg#: L-6169SR1
------------------	---------------	--------------------

**ANTIQUÉ Street Lamps**

2011-B W. Rundberg Lane      • Austin, TX 78758-5946  
(512) 977-8444      • Fax (512) 977-9622

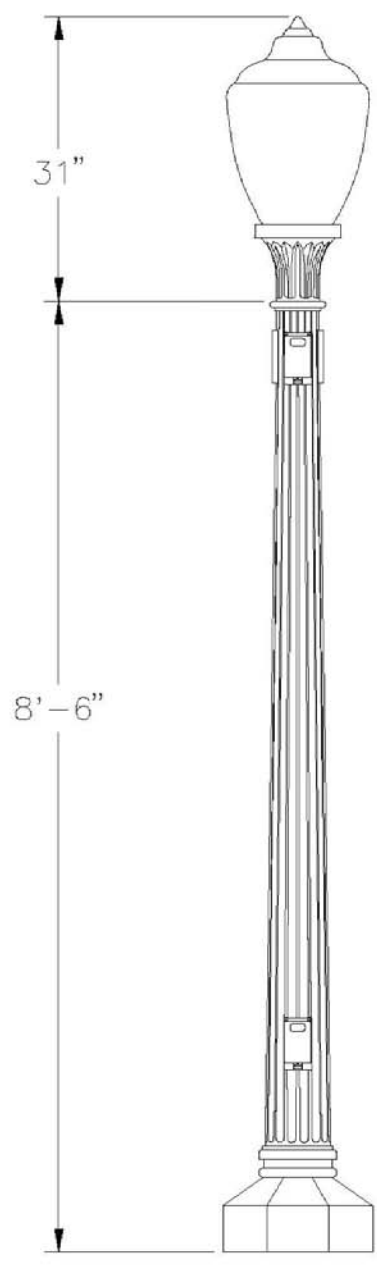

sign & date	<b><u>Customer Approval</u></b>
	_____
Catalog#	PA RF16CIT 8-6 2BAB 2FGIUS-S ANBK AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**  
 Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**  
 Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H □ - 100H □ - 175H □ - 250H	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

**Accessories:**  
 (2)BAB - banner arm mounting provision.  
 (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

**Anchorage:**  
 Post shall be furnished with (4) 3/4" hot-dip galvanized L-type anchor bolts.

**Finish:**  
 Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

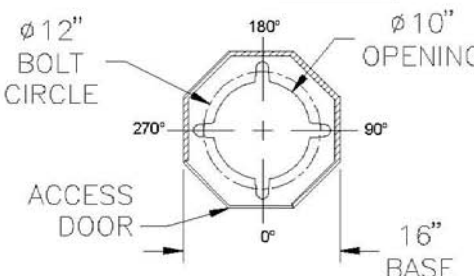


**Note:**  
 All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"      Overall Height: 11'-1"  
 Base Size: 16" OCT      Top Light Center: 9'-9"

date: 9/15/06	scale: NTS	dwg#: L-6169TR1
------------------	---------------	--------------------

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane      • Austin, TX 78758-5946  
 (512) 977-8444      • Fax (512) 977-9622

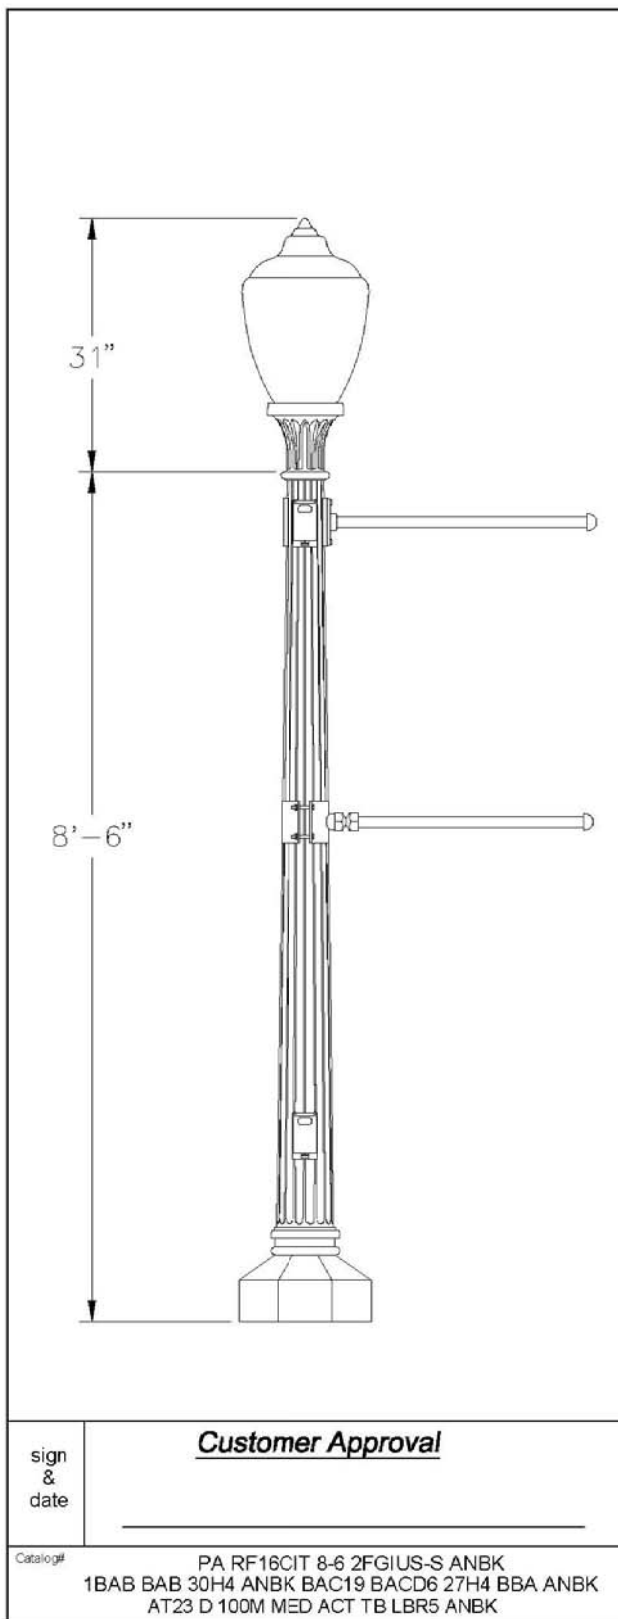

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**

BAB - banner arm mounting provision.

BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.

BAC19 BACD6 27H4 BBA - clamp on 1" x 27" banner arm with breakaway coupling and half sphere finial.


(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.

**Anchorage:**

Post shall be furnished with (4) ¾" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

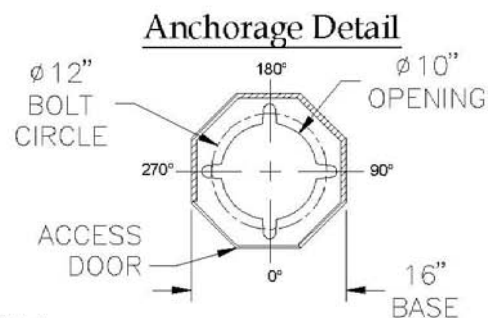

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"  
 Base Size: 16" OCT


Overall Height: 11'-1"  
 Top Light Center: 9'-9"

date: 9/15/06 scale: NTS dwg#: L-6169UR1


**ANTIQUÉ Street Lamps**



2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622




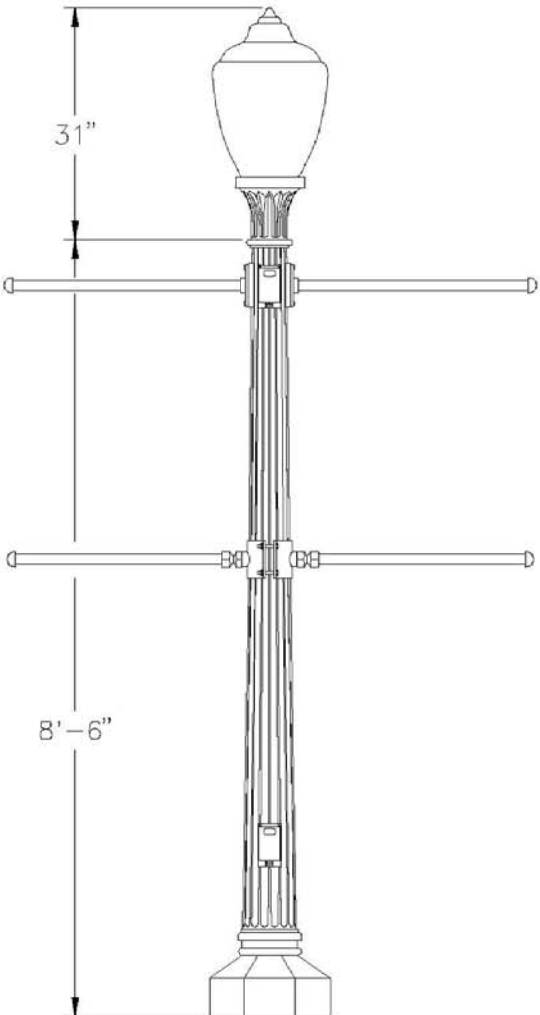

sign & date	<b><u>Customer Approval</u></b>	
	_____	
Catalog#	PA RF16CIT 8-6 2FGIUS-S ANBK 2BAB 30H4 ANBK BAC28 BACD6 27H4 BBA ANBK AT23 D 100M MED ACT TB LBR5 ANBK	
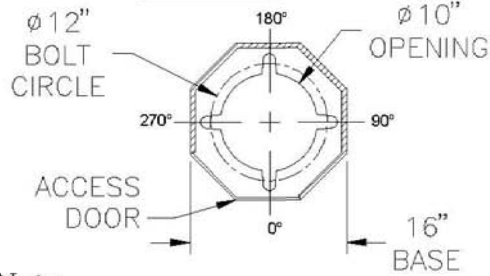
<b>Rockford Series</b> <b>Cast Aluminum Post</b>				
<b>Post:</b> Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.				
<b>Luminaire:</b> Luminaire shall be Ø15" x 31" tall with a cast aluminum base and a clear textured IES type 5 refractive acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly.				
<b>Lamp Type</b>	<b>Mercury Vapor</b>	<b>Metal Halide</b>	<b>High Pressure Sodium</b>	<b>Voltage</b>
<b>HID Socket Size</b>	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input checked="" type="checkbox"/> - MED <input type="checkbox"/> - MOG	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB
<b>Accessories:</b> (2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial. BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials. (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover.				
<b>Anchorage:</b> Post shall be furnished with (4) 3/4" hot-dip galvanized L-type anchor bolts.				
<b>Finish:</b> Post, accessories and luminaire shall be furnished with a black powder coat finish.				
<b>Anchorage Detail</b> 				
<b>Note:</b> All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.				
Post Height: 8'-6"      Overall Height: 11'-1" Base Size: 16" OCT      Top Light Center: 9'-9"				
date: 9/15/06	scale: NTS	dwg# <b>L-6169VR1</b>		
<b>ANTIQUE Street Lamps</b>				
2011-B W. Rundberg Lane      • Austin, TX 78758-5946 (512) 977-8444      • Fax (512) 977-9622				

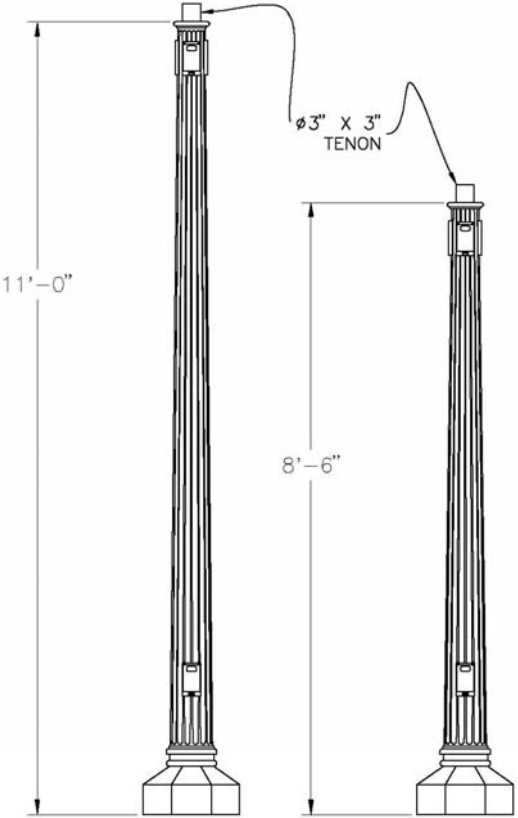 <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>PA RF16CIT 11 2BAB 2FGIUS-S 3T3 ANBK</p> </div> <div style="text-align: center;"> <p>PA RF16CIT 8-6 2BAB 2FGIUS-S 3T3 ANBK</p> </div> </div>		<p><b>Post:</b>          Post shall be all cast aluminum construction using cast iron tooling consisting of a octagonal tapered base and a 16 flute shaft with a Ø3" x 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.</p> <p><b>Accessories:</b>          (2)BAB - banner arm mounting provision.          (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover          FG-S/LE - provision for duplex outlet with weatherproof cover.</p> <p><b>Anchorage:</b>          Post shall be furnished with (4) ½" hot-dip galvanized L-type anchor bolts.</p> <p><b>Finish:</b>          Posts shall be furnished with a black powder coat finish.</p> <div style="text-align: center; margin-top: 20px;"> <p><u>Anchorage Detail</u></p>  </div> <p><b>Note:</b>          All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.</p>					
<p>Catalog Number : CREIGHTON POSTS</p>		<p>sign &amp; date</p>	<p><u>Customer Approval</u></p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">DATE: 9/15/06</td> <td style="width: 25%;">SCALE: NTS</td> <td style="width: 50%;">DWG. NO.: L-6169WR1</td> </tr> </table>	DATE: 9/15/06	SCALE: NTS	DWG. NO.: L-6169WR1
DATE: 9/15/06	SCALE: NTS	DWG. NO.: L-6169WR1					
<p><b>ANTIQUE Street Lamps</b></p> <p>2011-B W. Rundberg Lane • Austin, TX 78758-5946          (512) 977-8444 • Fax (512) 977-9622</p>							

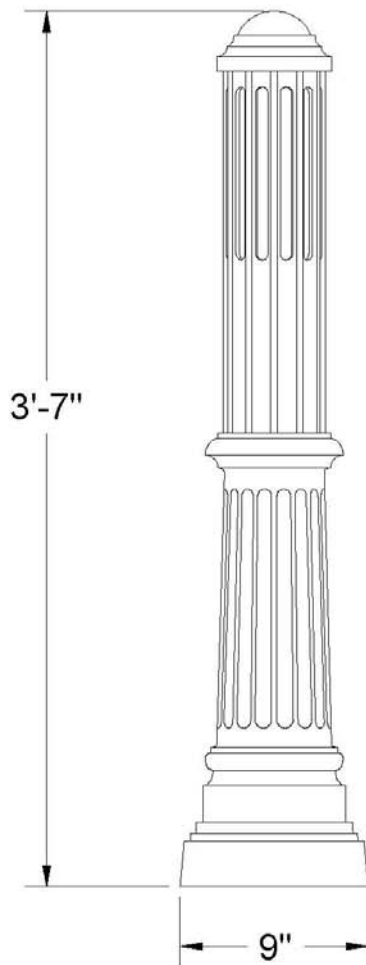

Catalog#

BLCA BS9DTL 100M MED GSS TB ANBK

**Sussex Series**  
**Cast Aluminum Bollard**

**Bollard:**

Bollard shall be all aluminum construction consisting of a tapered and fluted cast base and a Ø5" 12 flute aluminum shaft with a cast dome top. A door is located in the base for anchorage and wiring access. Bollard shall be furnished with a smooth sandblasted glass lens and a high intensity discharge ballast and a socket assembly.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Anchorage:**

Bollard shall be furnished with (4)  $\frac{3}{4}$ " hot-dip galvanized L-type anchor bolts.

**Finish:**

Bollard shall be furnished with a black powder coat finish.

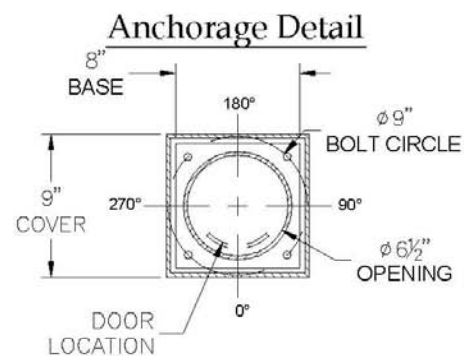

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Bollard Height: 3'-7"

Base Size: 9" SQ

date:

9/23/05

scale:

NTS


dwg#:

L-6636A

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

**NOTE:** Post rotated for illustrative purposes only. See orientation dwg. OD-117526 for correct orientation.

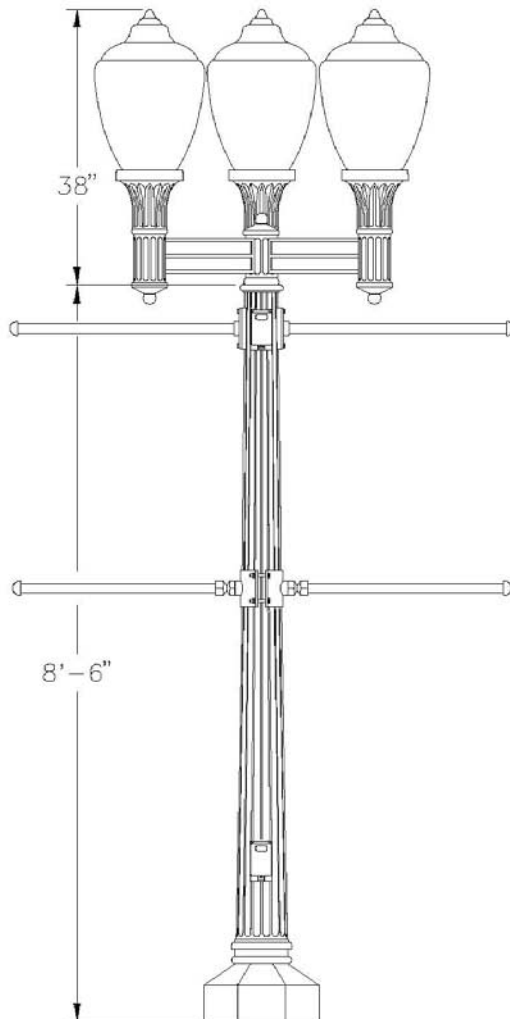

sign  
&  
date

**Customer Approval**

Catalog# PA RF16CIT 8-6 2FGUIS-S ANBK 2BAB 30H4 ANBK  
 BAC28 BACD6 27H4 BBA ANBK PCP36/3 ANBK  
 3AT23 D 100M MED ACT TB LBR5 ANBK

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction consisting of a octagonal tapered base and a 16 flute shaft with a 3" Ø X 5" tenon for arm mounting. A door is located in the base for anchorage and wiring access.

**Arm:**

Arm shall be all cast aluminum construction consisting of a post fitter with removable finial and 3 arms with Ø3" tenons for luminaire mounting.

**Luminaire:**

Luminaire shall be Ø15 1/2" x 30 1/2" tall with a cast aluminum base and a clear textured acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly and an aluminum low brightness reflector with IES type 5 distribution

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H ■ - MED □ - MOG	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

**Accessories:**

(2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials.

(2)FGUIS-S - duplex GFCI outlet with small white in use weatherproof cover.


**Anchorage:**

Post shall be furnished with (4) 3/4" hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, arm, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

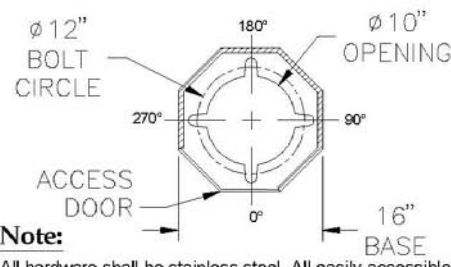

**Note:**

All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 8'-6"

Base Size: 16" OCT

Overall Height: 11'-8"

Top Light Center: 10'-4"

date:

8/29/06

scale:


NTS

dwg#:

L-6969AR1

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

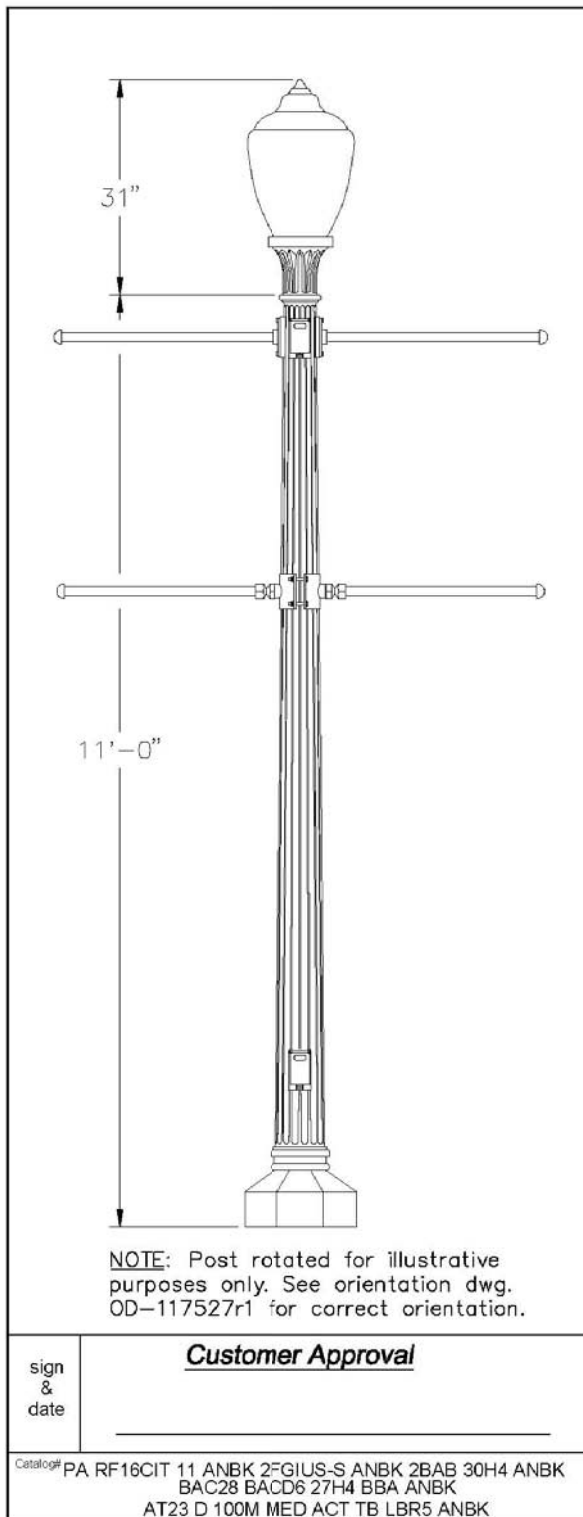

**Rockford Series**  
**Cast Aluminum Post**

**Post:**

Post shall be all cast aluminum construction using cast iron tooling, consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**

Luminaire shall be  $\varnothing 15\frac{1}{2}" \times 30\frac{1}{2}"$  tall with a cast aluminum base and a clear textured acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly and an aluminum low brightness reflector with IES type 5 distribution.

Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	<input type="checkbox"/> - 50H <input type="checkbox"/> - 75H <input type="checkbox"/> - 100H <input type="checkbox"/> - 175H <input type="checkbox"/> - 250H	<input type="checkbox"/> - 50M <input type="checkbox"/> - 70M <input checked="" type="checkbox"/> - 100M <input type="checkbox"/> - 150M <input type="checkbox"/> - 175M <input type="checkbox"/> - 250M	<input type="checkbox"/> - 35S <input type="checkbox"/> - 50S <input type="checkbox"/> - 70S <input type="checkbox"/> - 100S <input type="checkbox"/> - 150S <input type="checkbox"/> - 250S	<input type="checkbox"/> /120 <input type="checkbox"/> /208 <input type="checkbox"/> /240 <input type="checkbox"/> /277 <input type="checkbox"/> /480 <input checked="" type="checkbox"/> /TB

**Accessories:**


(2)BAB 30H4 - bolt on 1" x 30" banner arm with half sphere finial.  
 BAC28 BACD6 27H4 BBA - clamp on 1" x 27" banner arms with breakaway couplings and half sphere finials.  
 (2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover

**Anchorage:**

Post shall be furnished with (4)  $\frac{3}{4}"$  hot-dip galvanized L-type anchor bolts.

**Finish:**

Post, accessories and luminaire shall be furnished with a black powder coat finish.

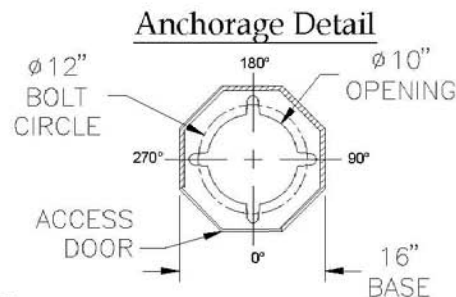

**Note:**


All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 11'-0"      Overall Height: 13'-7"  
 Base Size: 16" OCT      Top Light Center: 12'-3"

date: 8/29/06      scale: NTS      dwg#: L-6969Br2

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane • Austin, TX 78758-5946  
 (512) 977-8444 • Fax (512) 977-9622

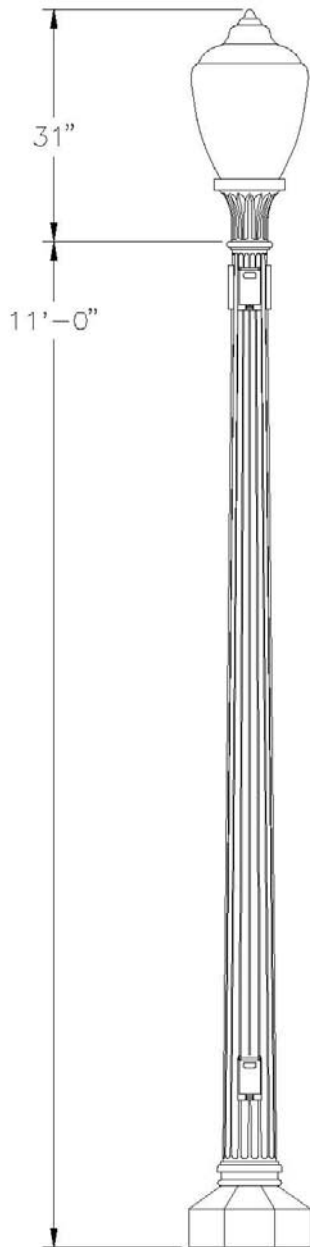

sign & date	<b><u>Customer Approval</u></b>
	_____
Catalog# PA RF16CIT 11 ANBK 2BAB PROVISION 2FGIUS-S ANBK AT23 D 100M MED ACT TB LBR5 ANBK	

**Rockford Series**  
**Cast Aluminum Post**

**Post:**  
Post shall be all cast aluminum construction consisting of a octagonal tapered base and a 16 flute shaft with a 3" tenon for luminaire mounting. A door is located in the base for anchorage and wiring access.

**Luminaire:**  
Luminaire shall be Ø15 1/2" x 30 1/2" tall with a cast aluminum base and a clear textured acrylic acorn globe. Luminaire shall be furnished with a high intensity discharge ballast and a socket assembly and an aluminum low brightness reflector with IES type 5 distribution.


Lamp Type	Mercury Vapor	Metal Halide	High Pressure Sodium	Voltage
HID Socket Size	□ - 50H □ - 75H □ - 100H □ - 175H □ - 250H	□ - 50M □ - 70M ■ - 100M □ - 150M □ - 175M □ - 250M	□ - 35S □ - 50S □ - 70S □ - 100S □ - 150S □ - 250S	□/120 □/208 □/240 □/277 □/480 ■/TB

**Accessories:**  
(2)BAB - Provision only- for bolt on 1" banner arm  
(2)FGUIS-S - duplex GFCI outlet with small while in use weatherproof cover

**Anchorage:**  
Post shall be furnished with (4) 3/4" hot-dip galvanized L-type anchor bolts.

**Finish:**  
Post, accessories and luminaire shall be furnished with a black powder coat finish.

**Anchorage Detail**

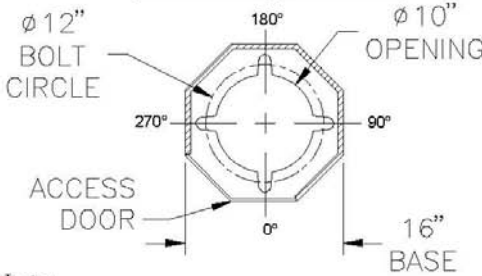

**Note:**  
All hardware shall be stainless steel. All easily accessible exterior hardware shall be tamper resistant.

Post Height: 11'-0"      Overall Height: 13'-7"  
Base Size: 16" OCT      Top Light Center: 12'-3"

date: 6/6/06	scale: NTS	dwg#: L-7021A
-----------------	---------------	------------------

**ANTIQUE Street Lamps**

2011-B W. Rundberg Lane      • Austin, TX 78758-5946  
(512) 977-8444      • Fax (512) 977-9622